


1/2

## MANHOLE COVER - LOCKED HINGED LIFT ASSISTED PTVAA - CLASS C250

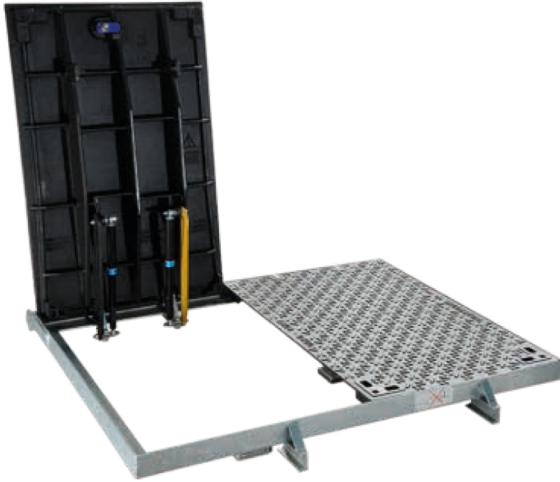

### REMARKS :

Lift assisted by gas struts  
Safety blocking to prevent accidental cover closure, activated automatically at the opening of the cover.

### SPECIALISATIONS :


Norm : **EN 124-2**  
Loading: **250 kN**  
Locking : ¼ turn lock H Ø22 Stainless Steel  
Quality Label : Tüv 


### MATERIAL & COATING :

**Cover** : Spheroidal Cast Iron  
EN-GJS-500. Water Based Black Paint  
**Frame** : Steel Hot-Dip Galvanized  
**Hardware** : Stainless Steel

### OPTIONS :

Special look : burglar-proof SAE  
Fall safety equipment  
Custom Badging & Logo  
Stainless Steel frame  
Stainless Steel gas struts

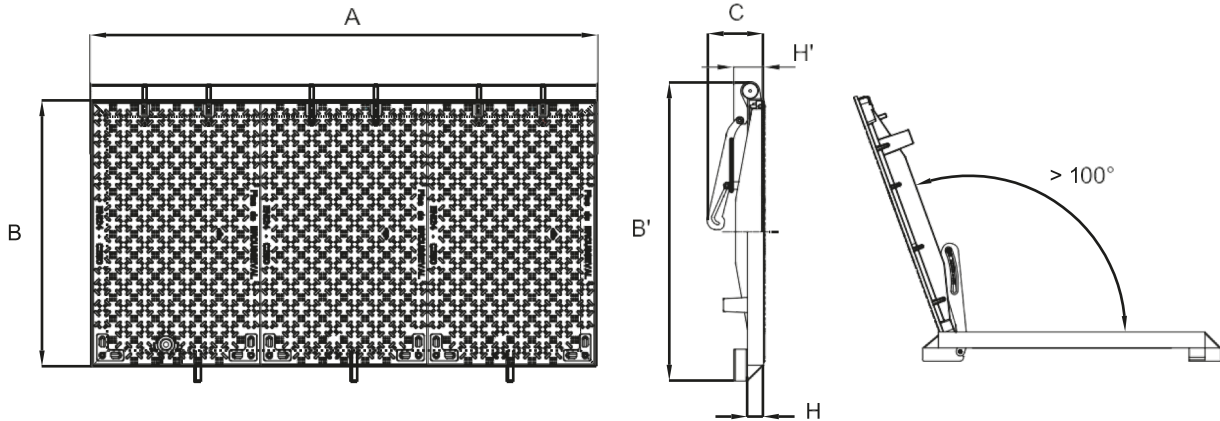

Ref.	Description	Lay-out	Clear opening without lid	Freeway	A	B	B'	C	H	H'	Total weight
mm											Kg
10010	1/2 P2TVAA		630 x 887	630 x 810	747	1004	1125	220	60	110	93,5
7993	P2TVAA		1161 x 887	1161 x 810	1281	1004	1125	220	60	110	176
10012	L5TVAA		1795 x 887	1795 x 810	1915	1004	1125	220	60	110	258,5
10013	L6TVAA		2429 x 887	2429 x 810	2549	1004	1125	220	60	110	342
10014	M2TVAA		3062 x 887	3062 x 810	3182	1004	1125	220	60	110	420,5
Weight / Lid (kg)											72

\*External frame measures

All dimensions, weights and norms are given for information only. BERGTEC reserves the right to modify the specifications of products given in the present document.

2/2

## MANHOLE COVER - LOCKED HINGED LIFT ASSISTED PTVAA - CLASS C250



### BESPOKE

On request, the manhole cover can be tailor-made with a special **badging embossed** and moulded in raw material & with a topcoating colored polyester paint.




### 1/4 TURN LOCK

Cam and shaft in stainless steel. Locking and unlocking by rotation of a quarter turn of the screw.

1/4 turn locking systems are equipped as **standard with H22 hex heads.**

On request, Soval studies and provides you with **coded and customizable systems** to reinforce the security of these closures.

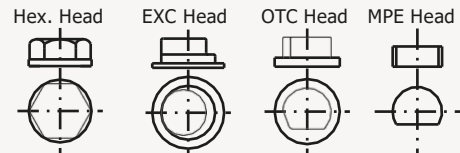

## Associated products

