

1/2

MANHOLE COVER EVOLUTION 2xKTVAA - 250 KN SLOW TRAFFIC FRAME MONOBLOC



PLACE OF INSTALLATION :

Slow Traffic : Products suitable for hard shoulders, parking areas.

SPECIFICATIONS :

Loading : **250 kN**

Locking : ¼ turn lock H Ø22 Stainless Steel

MATERIAL & COATING :

Covers : Spheroidal Cast Iron

EN-GJS-500-7. Water Based Black Paint

Frame : Steel Hot-Dip Galvanized


Hardware : Stainless Steel / Cast Iron

OPTIONS :

Special lock : burglar-proof SAE

Custom Badging & Logo

Fall safety Equipment

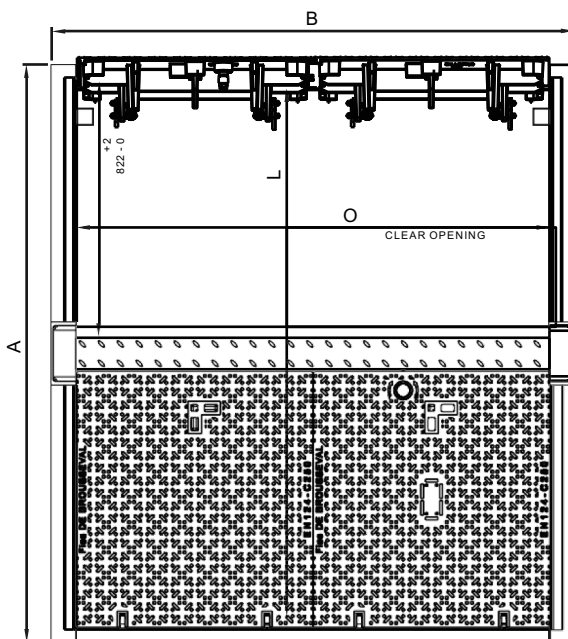

Code	Description	Lay-out	Clear opening	A	B	H	h	Weight	
								Beam	Total
				mm				Kg	
42019	2xK2TVAA		1500 x 1674	1834	1661	414	272	116	636
/	2xK3TVAA		2250 x 1674	1834	2410	414	272	173	898
Weight / Lid (Kg)								71	

All dimensions, weights and norms are given for information only. BERGTEC reserves the right to modify the specifications of products given in the present document.

2/2

MANHOLE COVER EVOLUTION 2xKTVA - 250 KN SLOW TRAFFIC FRAME MONOBLOC

REMARKS :

Lift assisted by gas jacks
Safety blocking to prevent accidental cover closure, activated automatically at the opening of the cover.
Cut off the storage corners before sealing and concrete pouring.

CONCRETE FORMWORK :

Description	Lay-out	O	L
		mm	
2xK2TVAA		1500	1674
2xK3TVAA		2250	1674

