



1/2

ROUND MANHOLE COVER MAXUM WATERTIGHT CLASS D400



PLACE OF INSTALLATION :

Group 4, Class D 400, High Traffic

SPECIFICATIONS :

Norm : EN 124-2 / NF 110

Loading : 400 kN

Quality Label : Afnor



MATERIAL & COATING :

Cover & Frame : Spheroidal Cast Iron GS 500-7. Water Based Black Paint

Gasket : EPDM Moulded Monobloc


REMARKS :

Locked by 3no screws (recommended tightening torque : 70 Nm)

Pressure tight up to 1 Bar

OPTIONS :

Custom Badging & Logo

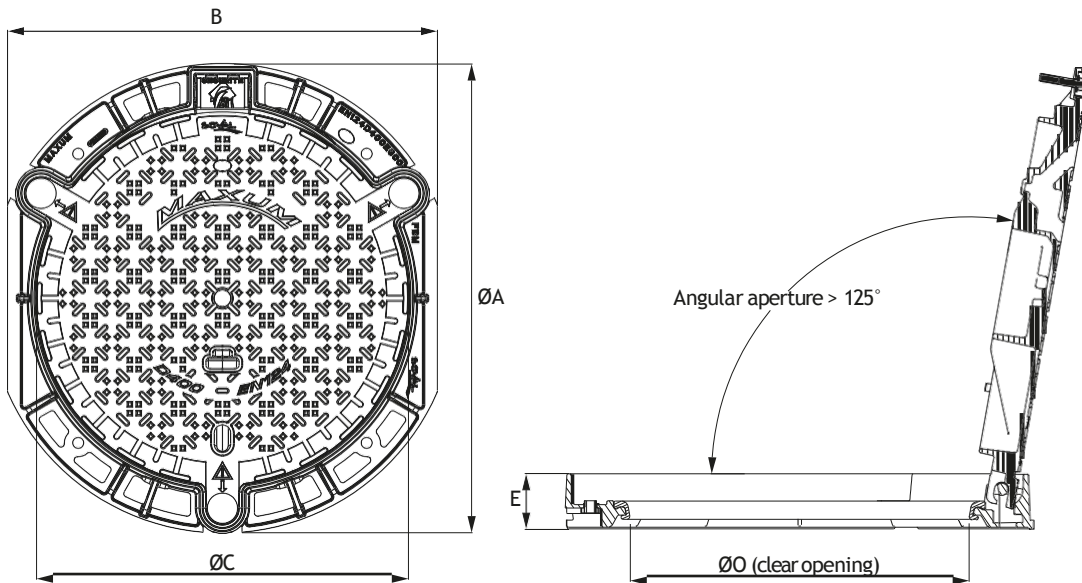

Reference	Version	Frame	B	Ø O	Ø C	Ø A	E	Weight	
								Cover	Total
								mm	
								Kg	
25816	Safety*	Round	780	Ø 610	Ø 675	Ø 850	100	58	97
25855	Exploitation*	Round	780	Ø 610	Ø 675	Ø 850	100	58	97



2/2

ROUND MANHOLE COVER MAXUM WATERTIGHT CLASS D400



PRESSURE TIGHT UP TO 1 BAR

Pressure tight up to 1 bar, protecting the structure from pressure increase in the network. With just **3no stainless steel screws**, the cover remains easy to use.

SECURED OPENING



Angular **aperture** and **safety blocking** at 125°

HINGE WITH NON-CLOGGING DESIGN



Largest hinge of the market (90mm) with a **non-clogging** design for a better stability when the cover is open

BESPOKE



On request, maxum can be tailor-made with a special **badging embossed** and moulded in raw material & with a topcoating colored polyester paint

EPDM GASKET SOLIDITY



High stability with **EPDM gasket** moulded monobloc 80 shore A fixed on the frame. High resistance to temperature variations (-50 up to +120°C)


Associated products



ROUND MANHOLE COVER
MAXUM 800



FALL SAFETY EQUIPMENT FOR
MAXUM 600

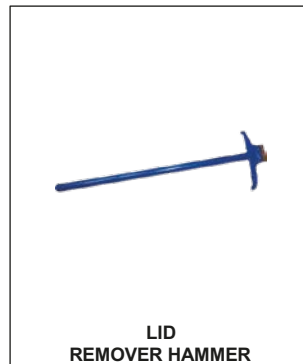

LID
REMOVER HAMMER



KEYS H HEAD, EXC HEAD,
OTC HEAD

All dimensions, weights and norms are given for information only. BERGTEC reserves the right to modify the specifications of products given in the present document.