

HINGED HYDRAULIC ACCESS COVER HYDR'O CLASSE D400



PLACE OF INSTALLATION :

Group 4, Class D400 : see EN 124-2

SPECIFICATIONS :

Norm : **EN 124-2 / NF 110**

Loading : **400 kN**

Quality Lbael : Afnor 

MATERIAL & COATING :

Spheroidal Cast Iron GS 500-7.



Water Based Black Paint.

REMARKS :

Hydraulic closing prevents odors rising
Hinged lid

OPTIONS :

Logo & Custom Badging
Locking system

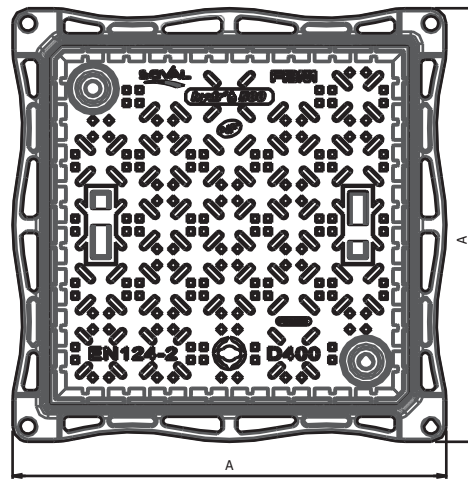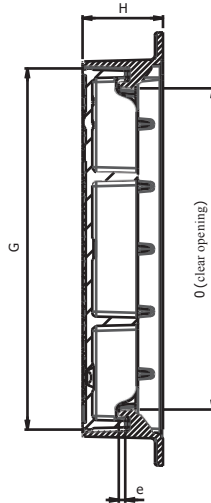

Description	Ref	Version	O	A x A'	C	H	e	Mass		
								cover	total	surface
								Kg		kg/m ²
Hydr'o 400	44935	w/out lock	305	440 x 440	350	100	8	15,80	28,50	169,30
Hydr'o 500	43806	w/out lock	400	540 x 540	450	100	8	25,10	41,10	156,25
Hydr'o 600	43808	w/out lock	500	640 x 640	550	100	8	34,70	54,20	138,80
Hydr'o 700	43810	w/out lock	600	740 x 740	650	100	8	46,80	69,20	130,00
Hydr'o 400	44936	with lock	305	440 x 440	350	100	8	15,80	28,50	169,30
Hydr'o 500	43807	with lock	400	540 x 540	450	100	8	25,10	41,10	156,25
Hydr'o 600	43809	with lock	500	640 x 640	550	100	8	34,70	54,20	138,80
Hydr'o 700	43811	with lock	600	740 x 740	650	100	8	46,80	69,20	130,00